

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



04 JAN 2005



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005584 A1

(51) International Patent Classification⁷:
9/00, 1/24

C25B 9/02,

(72) Inventors; and

(21) International Application Number:

PCT/GB2003/002758

(75) Inventors/Applicants (*for US only*): HODGSON, Graham [GB/GB]; Fluorogas Limited, Hillhouse International, P.O. Box 4, Thornton-Cleveleys, Lancashire FY5 4QD (GB). DAWSON, Robert [GB/GB]; Fluorogas Limited, Hillhouse International, P.O. Box 4, Thornton-Cleveleys, Lancashire FY5 4QD (GB).

(22) International Filing Date: 27 June 2003 (27.06.2003)

(25) Filing Language: English

(74) Agent: GODDARD, David, John; Harrison Goddard Foote, Orlando House, 11c Compstall Road, Marple Bridge, Stockport SK6 5HH (GB).

(26) Publication Language: English

(30) Priority Data:
0215697.4


6 July 2002 (06.07.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): THE BOC GROUP PLC [GB/GB]; Chertsey Road, Windlesham, Surrey GU20 6HJ (GB).

[Continued on next page]

(54) Title: FLUORINE CELL

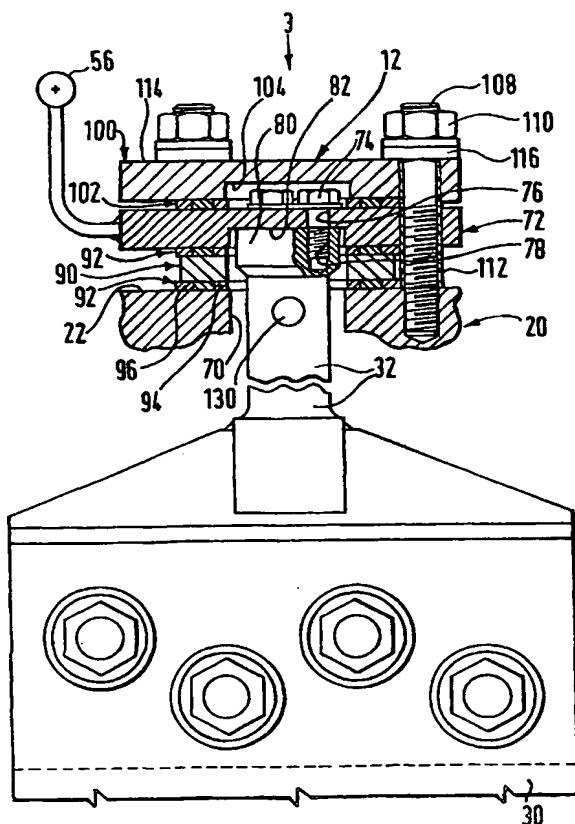

(57) Abstract: An arrangement for installing and sealing an anode within a fluorine generating electrolytic cell is described, the arrangement comprising: an anode connection member, said anode connection member (32) passing through an aperture (70) in a skirt wall (20) and being in electrical connection with a skirt wall closure member (72) wherein the skirt wall closure member is sealingly engaged with said skirt wall and is electrically insulated therefrom.